

Model **ZOC33**

Electronic Pressure Scanning Module

Data Sheet No. G480

Scanivalve Corp. 

Features

- 0 - 50 psid pressure range
- Field replaceable pressure sensors
- 50kHz scan rates
- Duplex 128 pressure inputs with 64 pressure sensors
- On board sensor excitation

General Description

The Model ZOC33 electronic pressure scanning module is extremely compact and accepts up to 64 pneumatic inputs and converts them to high level electronic signals. Each ZOC33 module incorporates 64 individual silicon pressure sensors, calibration valving, a high speed multiplexer (50kHz), and an instrumentation amplifier. An integral "duplexing" valve is available to allow the ZOC33's 64 sensors to service up to 128 input pressures.

The integral calibration valve has 4 modes of operation: operate, calibrate, purge, and leak test. Each group of 8 pressure sensors has its own calibration valving and multiplexer which allows the ZOC33 module to incorporate multiple pressure ranges and easy sensor replacement. This calibration valve allows the ZOC sensors to be automatically calibrated on-line.


The ZOC33's extremely compact design (approximately .1 cu. in. per channel) permits installation within the very confined spaces typically available in wind tunnel models.

Three versions are available:

ZOC33/64Px - 64 Px inputs each with its own dedicated sensors.

ZOC33/64PxX2 - 128 Px inputs duplexed* between 64 sensors.

ZOC33/64Px - Valveless (no calibration valve).

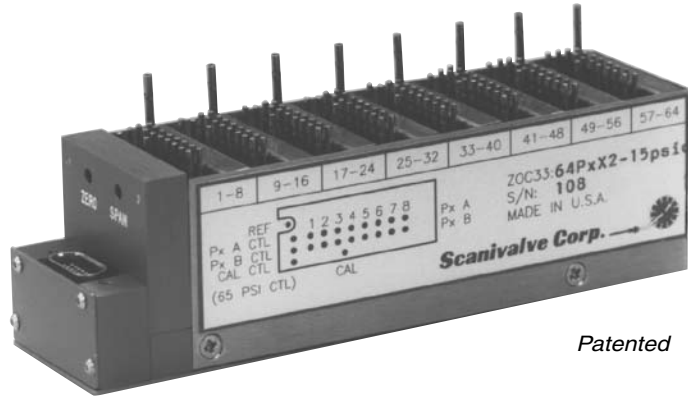

Patented

*ZOC33/64Px
Pressure Scanner (shown)*

Applications

The ZOC33 electronic pressure scanning module is specifically designed for use in wind tunnel and flight tests where operational conditions are very space constrained and pressures do not exceed 50 psi. It is ideal for use inside small supersonic wind tunnel models.

It may be mounted in any position so the pressure sensors may be close coupled to the pressure sources to be measured. A removable header allows for easy installation and removal without breaking the pneumatic lines. When the ZOC33 is used for flight test, it must be installed in a thermostatically controlled heater jacket.

The ZOC33 module is designed to be used in conjunction with our Model RAD3200 Remote A/D or our Model DSM3200 Digital Service Module. Each ZOC33 pressure scanner incorporates an embedded RTD to monitor the temperature of the pressure sensors. The RAD3200 communicates via USB. The DSM3200 communicates via TCP/IP, RS-232, or ARINC 429.

The ZOC33 is also designed to operate with Scanivalve's Module Address Control Unit (MACU2), as well as customers' "in-house" data systems.

*Duplexing shares 2Px inputs with one pressure sensor. This doubles the usefulness of a ZOC33 module without increasing the installation volume.

Px = Pressure Input

Specifications

Inputs (Px): 128 or 64 .042 inch (1.067mm)
O.D. tubulations

Full Scale Ranges: ±10, 20 inch H₂O, 1, 2.5, 5, 15, 50 psid
(±2.5, 5, 7, 17, 35, 100, 350 kPa)

Accuracy:¹
10 inch H₂O † ±0.15% F.S.
20 inch H₂O ‡ ±0.12% F.S.
1 to 2.5 psid ±0.10% F.S.
5 to 50 psid ±0.08% F.S.

Sensor Addressing: 6 bit binary, CMOS level

Full Scale Output: Standard: ±2.5Vdc
Optional: ±5Vdc, ±10Vdc

Resolution: Infinite

Scan Rate: 50kHz

Operating Temperature: 0° to 60°C

Temperature Sensitivity:

Range	Zero	Span
10 inch H ₂ O	0.25% FS/°C	0.10% FS/°C
20 inch H ₂ O	0.20% FS/°C	0.08% FS/°C
1 to 50 psid	0.10% FS/°C	0.05% FS/°C

Connector Type: Cannon 15 pin MDM 15SL2P

Power Requirements: ± 15Vdc @ 110mA

Overpressure Capability:
(With no damage)

10 inch H₂O, 20 inch H₂O,
1 psid = 10 psi (70kPa)
2.5-50 psid = 400% or 75 psi
(517kPa) (whichever is less)


Maximum Reference Pressure: 50 psig (345kPa)

Media Compatibility: Gases compatible with silicon,
silicone, aluminum, and Buna-N

Weight: ZOC33/64Px: 11 ozs. (312 gm)
ZOC33/64PxX2: 13 ozs. (369 gm)

Ordering Information

ZOC33/64Px - 1 psid

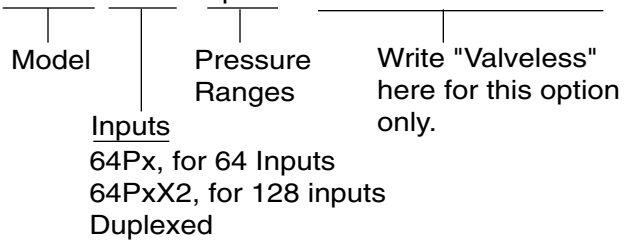


¹Note: Accuracies are following a calibration with Scanivalve DSM3400 or RAD3200 data systems.

† 10 inch H₂O = 25.4 cm H₂O = .36127 psi

‡ 20 inch H₂O = 50.8 cm H₂O = .72254 psi

Dimensions

Inches (mm)

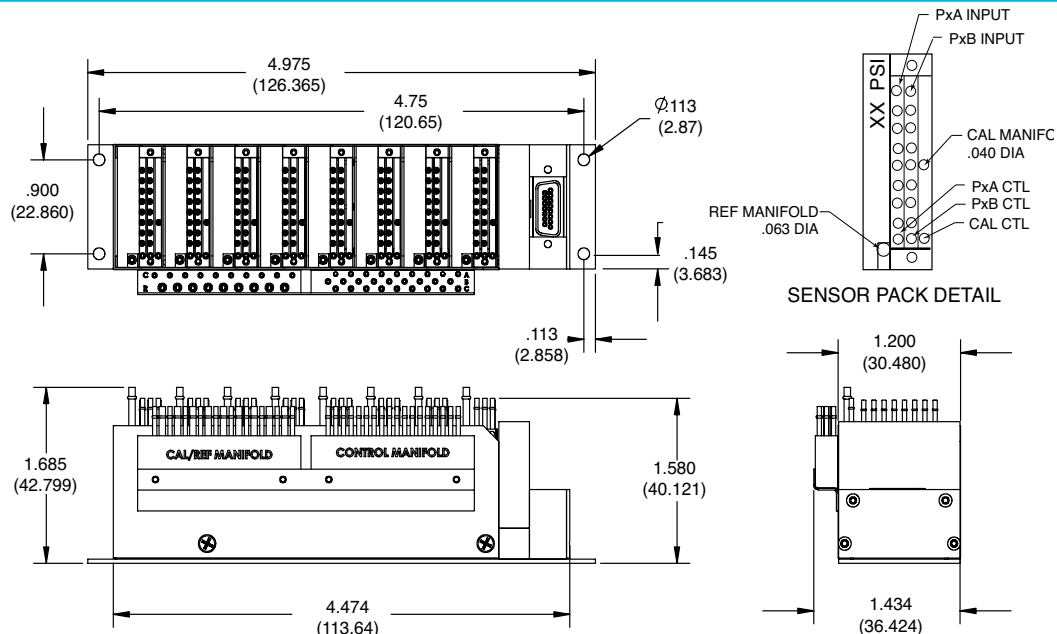

Scanivalve Headquarters
1722 N. Madson Street
Liberty Lake, WA 99019
Tel: 509-891-9970
800-935-5151
Fax: 509-891-9481
e-mail: scanco@scanivalve.com

European Technical Office
P.O. Box 3317
Bath BA1 7XN, UK
Tel: 01225-852-581
Fax: 01225-852-561

